(19) World Intellectual Property **Organization**

International Bureau



549 728

(43) International Publication Date 30 September 2004 (30.09.2004)

(10) International Publication Number WO 2004/083648 A1

- (51) International Patent Classification7: B27B 17/08, F03C 1/16, F04B 49/03
- F15B 13/04,
- (74) Agent: ALBIHNS GÖTEBORG AB; Box 142, S-401 22 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

(21) International Application Number:

PCT/SE2004/000409

- (22) International Filing Date: 19 March 2004 (19.03.2004)
- (25) Filing Language:

Swedish

(26) Publication Language:

English

ZW.


(30) Priority Data: 0300761-4

21 March 2003 (21.03.2003)

- AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (71) Applicant (for all designated States except US): PARKER HANNIFIN AB [SE/SE]; S-461 82 Trollhättan (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): VALLEBRANT, Per-Ola [SE/SE]; Sandhemsvägen 74, S-461 42 Trollhättan (SE). SANNELIUS, Mikael [SE/SE]; Riastigen 14, S-125 33 Älvsjö (SE).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ARRANGEMENT FOR CONTROLLING A HYDRAULICALLY DRIVEN MOTOR

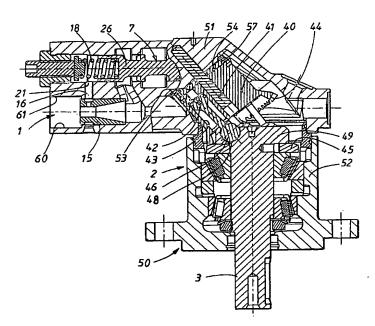

(57) Abstract: The present invention relates to an arrangement for controlling a hydraulically driven motor, forming part of a hydraulic system in which hydraulic fluid under pressure forms a main flow through a main duct in which the motor is connected. The motor drives a varying load, and one or more valves (7) are adapted for controlling the hydraulic fluid flow through the motor on the one hand during operation and on the other hand for starting and stopping of the motor. One of the valves consists of a flow control valve (7) which is connected in the main duct (1) downstream of the outlet of the motor, and the flow control valve (7) is integrated with the motor housing (50).

WO 2004/083648 A1



Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.